

# LOHAS

AUSTRALIA

TILE COLLECTION  
**CREASING TILES**  
**SPEC GUIDE**

LOHASAU.COM



## **CREASING TILES**

Creasing tiles are plain clay tiles without nibs or camber. They are used for cappings and copings, damp proof courses (DPC), external cills, corbelling, arches, chimneys and decorative quoins.

COLOR RANGE



**BROWN BRINDLE**



**BLUE BRINDLE**




**RED**

# Technical Specifications for Creasing Tiles

**SIZE:** 265mm x 165mm  
**THICKNESS:** 11mm  
**FINISH:** Smoothfaced  
**WEIGHT/TILE:** 1.19kg  
**PACKING:** 1000 tiles per pack  
**WEIGHT /PACK:** 1.21 tonnes

Water absorption	3.9%
Transverse strength	880N
Freeze thaw resistance	conforms to BS EN 539-2:2013

## Laying Instructions for Creasing Tiles

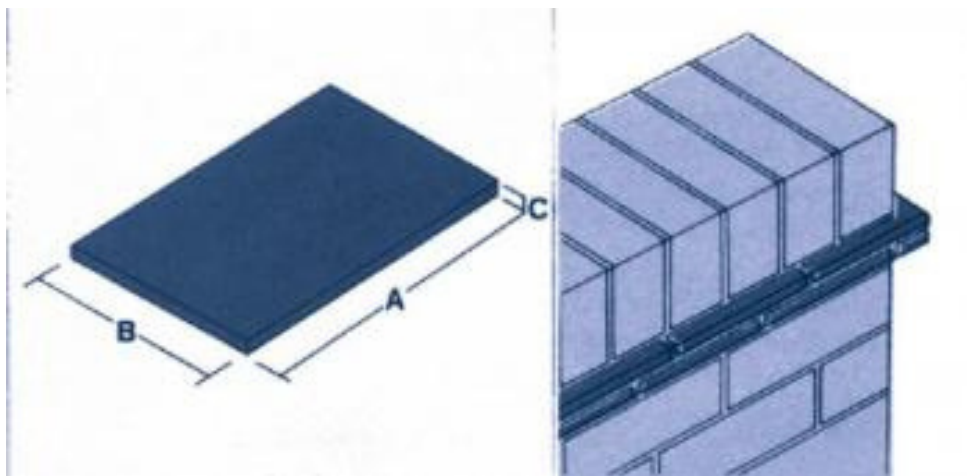

Creasing Tiles should be laid with a broken bond and a minimum lap of 75mm. The joint width between tiles should not exceed 10mm in all applications.

When cutting creasing tiles, a mechanical disc cutter is recommended over hand cutting particularly when used in exposed areas, as this will provide a neater appearance and help avoid cracks that can reduce the performance of the creasing tile.

For freestanding walls where creasing tiles are used under brick cappings, day courses of clay tiles should be laid with staggered joints in a 1:1/4:3 mortar and a minimum projection from the wall of at least 25mm.



**CASE STUDIES**



**CREASING TILE CLADDING**





**DECORATIVE STACKED CREASING TILES**

**DECORATIVE PAVING DETAIL WITH CREASING TILES**





# LOHAS

## CONTACT US

P 02 9566 2114  
E [info@lohasau.com](mailto:info@lohasau.com)

W [lohasau.com](http://lohasau.com)  
IG [@lohas\\_australia](https://www.instagram.com/lohas_australia)

LOHAS Australia is a proud distributor of the Ketley Brick product range.

