







MARSELLA



Specification

•Tile weight: 3.7 kg

•Tiles/sqm (coverage): 13 •Batten measures: 35-39 cm

• Tiles/ pack: 6

•Dimension: 444 x 265 mm



Flexural strength



Impermeability




Frost resistance




Geometric characteristics



MARSELLA Colours

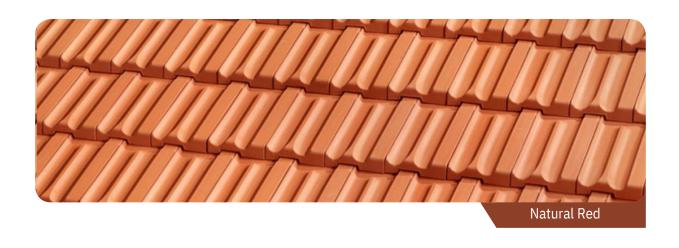

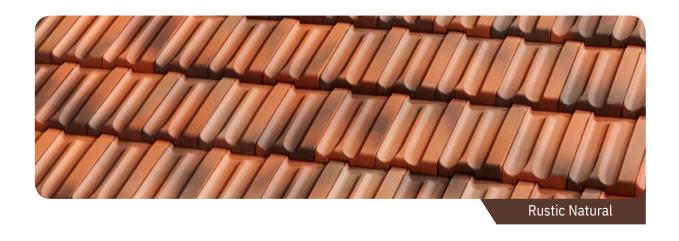

The high firing temperatures to which Marsella is subjected guarantees an optimal level of water absorption, an exceptional mechanical resistance and the necessary physical and chemical characteristics to ensure the best behavior in presence of cold weather & strength.



Sound Insulation

The roof proves a sound barrier, improving comfort and reducing acoustic noise inside buildings



Thermal Insulation

Clay roof tile provides shading to the buildings. Associated with ventilation, the clay roof tile covering significantly reduces the heating effect of sun exposure.



Techinical Support

Provided by experienced technical people. Technical support to the applicator clarifies any doubt during the construction period



Architects Support

Service support for the project, calculation of quantities, fittings identification and budgeting. Beyond the provision of general construction details for each type of roof tile, this service assists and assesses its integration into the project.



Tank water safe

Clay roof tile is a non-toxic product with a natural origin, allowing the use of rainwater for multiple purposes.



Minipacks

Assembled roof tiles in minipacks to enable better storage, pallet stability and facilitate transport and handling during application.



recommended accessories

- Ridge
- Starter
- Apex
- •Half tile

- •Barge tile (right)
- •Barge tile (Left)
- •Gable tile (right)
- •Gable tile (left)







Ridge tile

Hip starter

3-way Apex





Barge tile left

Barge tile right







Gable tile right

Half tile

Gable tile left



CONTACT US

P 02 9566 2114 E info@lohasau.com W lohasau.com IG @lohas_australia

